

EIP-UJT100

WUXGA Large Class 3-chip DLP Projector

EIKI
Eiki grows with you

Professional Image Quality by Flagship 3-chip DLP projector



EIP-UJT100 | 14000 lm | WUXGA(1920 x 1200)

Outstanding Features

High Image Quality

WUXGA (1920 x 1200)
Brightness :14000 lm
Contrast Ratio : 2000 : 1
Variety of Inputs (HDBaseT, 3G-SDI, HDMI , DVI, etc...)

Professional installation


Optional Lens (6 Types)
Horizontal & Vertical Lens Shift (Max. H: +/-10 , V: -25 to +50 %)
Horizontal & Vertical Keystone (Max. H: +/- 35 , V: +/- 20 degree)
Corner Keystone Correction
Powered Zoom and Focus
Lens Center Function

Versatile function


Image Warp
Edge Blending
3D Function (3D-DVI)
Mechanical Shutter
Picture in Picture
Pleated Filter

3-chip DLP system

- ⊙ High Brightness
- ⊙ High Contrast
- ⊙ High Color reproduction
- ⊙ High Durability

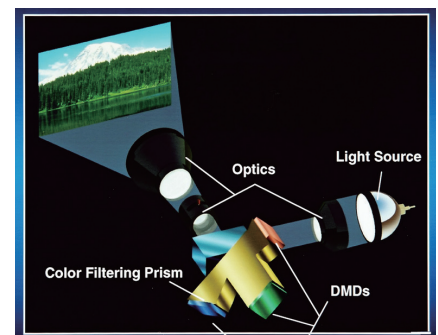


HDBaseT

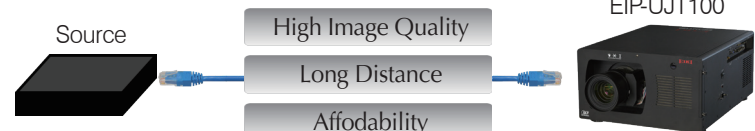

EIP-UJT100 WUXGA Large Class 3-chip DLP Projector

Terminal

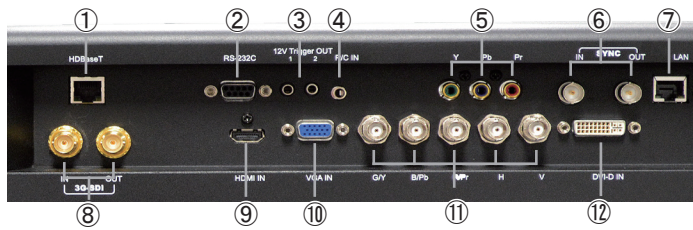

- ① HDBaseT ⑤ 3RCA (Y,Cb,Cr) ⑨ HDMI
- ② RS232C ⑥ 3D Sync IN/OUT ⑩ VGA
- ③ 12V Trigger Out ⑦ LAN ⑪ 5BNC (RGBHV/Y,Cb,Cr)
- ④ R/C Jack ⑧ 3G-SDI (IN/OUT) ⑫ DVI-D

Dimensions



W x D x H
505 x 550 x 250 mm


Remote Control




Option Lens

Type	Parts Number	Throw Ratio	Zoom Ratio	Lens Shift		Weight
				Up / Down	Left / Right	
Short Fixed	AH-D22010	0.67 : 1	-	0 %	0 %	4.5 kg
Short Fixed	AH-D22020	1.12 : 1	-	-25 to +50 %	0 %	5.8 kg
Short Zoom	AH-D22030	1.39 – 1.87 : 1	1.34	-25 to +50 %	+/- 5 %	6.1 kg
Standard Zoom	AH-D21010	1.87 – 2.56 : 1	1.37	-25 to +50 %	+/- 10 %	5.1 kg
Long Zoom	AH-D23010	2.56 – 4.16 : 1	1.62	-25 to +50 %	+/- 10 %	5.2 kg
Long Zoom	AH-D23020	4.16 – 6.96 : 1	1.67	-25 to +50 %	+/- 10 %	4.6 kg


Lamp(AH-D31010)



Front Filter(3243270701)



Rear Filter(3243411700)



Specifications

Model	EIP-UJT100
Panel Size	0.96" 3-chip DMD
Resolution	WUXGA (1920 x 1200)
Aspect Ratio	16:10
Brightness	14000 lm
Contrast Ratio	2000 :1
Projection Lamp	465W x 2
Estimated Lamp Life (Eco / Normal)	2500 / 2000 hrs
Screen Size	80 - 600 inch
Zoom Ratio	Depend on lens (See above table)
Throw Distance (Wide - Tele)	Depend on lens (See above table)
Throw Ratio	Depend on lens (See above table)
Power Lens Shift (AH-D21010)	V: -25% to +50% , H : +/-10% (See above table)
Keystone Correction	V: +/- 20 degree , H : +/- 35 degree Corner Keystone
Projector Elevation Adjustment	+/- 5 degree
Scanning Frequency	H sync: 15.63 - 91.15 kHz , V sync: 23.98 -120.0 Hz
Dot Clock	162MHz
Image Orientation	Normal, Reversed, Inverted
Remote Control	Wireless (Infra Red) x 1
Computer : Compatibility	WUXGA (1920 x 1200) - VGA (640 x 480)
Video : Compatibility	1080 i/p, 720p, 576 i/p, 480 i/p

Model	EIP-UJT100	
Input Terminal	HDBaseT Lite	RJ-45 x 1
	3G-SDI	BNC x 1
	HDMI (1.3)	HDMI x 1
	DVI	DVI-D x 1
	VGA (Analog)	D-SUB 15 pin x 1 , 5BNC x 5
	Component	3RCA x 1
Output Terminal	3G-SDI	BNC x 1
Control Terminal	LAN	RJ-45 x 1
	Serial Port (RS-232C)	D-sub9 pin x 1
	Remote control	3.5-mm, mini jack x 1
	12V trigger	3.5-mm, mini jack x 2
	3D Sync (IN/OUT)	BNC x 2
Fan Noise (Eco / Normal)	42 dB / 46 dB	
Dimensions (W x D x H)	505 x 550 x 250 mm	
Weight	37 kg	
Power Requirements	100 - 240V AC 50-60Hz	
Power Consumption	Normal	1230 W (110V) / 1150 W (220V)
	Stand-by	RJ45 - Off : < 2W , RJ45 - On : < 5W
Thermal dissipation	4198 BTU / hr (110V) , 3925 BTU / hr (220V)	
Operating Condition	Temperature	5 °C - 40 °C
	Humidity	10 - 95 %
Standard Accessories	AC Power Cable(US)110V, (US)200V, (EU), (China), Remote Control, Battery AAx2, Owners Manual (CD-ROM), Quick Start Guide, Wired Remote Cable	



Projectors... and more!

Specifications subject to change without notice.

©2015 Eiki International, Inc. Printed in the USA. 02/09/15

Talk to your EIKI Dealer... the "pro" in projectors.

Eiki International, Inc.

30251 Esperanza, Rancho Santa Margarita, CA 92688-2130

Tel: 800-242-3454; Fax: 800-457-3454, E-mail: usa@eiki.com

In Canada, 9170 County Rd. 93 - Suite 304, Midland, ON L4R 4K4

Phone: 800-563-3454, E-mail: canada@eiki.com

<http://www.eiki.com>